

EIGHTSHOT

BICYCLES



2025.26





CONTENT

04	GROOT 246
06	LOAMER 24
08	JAMBAM 20 / 24
10	COADY 16
14	COADY 20
20	COADY 24
30	COADY 27.5

GROOT 246




7 + Jahre/years

Höhe/height 130 - 155 cm

Schritthöhe/step height 62 - 72 cm

- ✓ Hydroformed-Tubing AL 6061-T6, 120 mm rear travel,
BSA 73, 142 x 12 thru axle, internal cable routing,
Dropper Seatpost ready, convertible from 24" to 26" wheels
- ⚙ Microshift Advent X 10 Speed gear, trigger shifter
- 🔊 30T Narrow Wide 11-42t
- 🏠 RST First 26 120 mm air suspension fork, 15 x 100 thru axle
127 mm
- 🪑 EIGHTSHOT SEAT 231 mm x 140 mm
Magura MT 30
- 🚴 Schwalbe Big Betty 24" x 2,4, Tubeless ready
- 📊 12,6 kg (ohne Pedale/without pedals)




7068




CONVERTIBLE
from 24" - 26" wheels



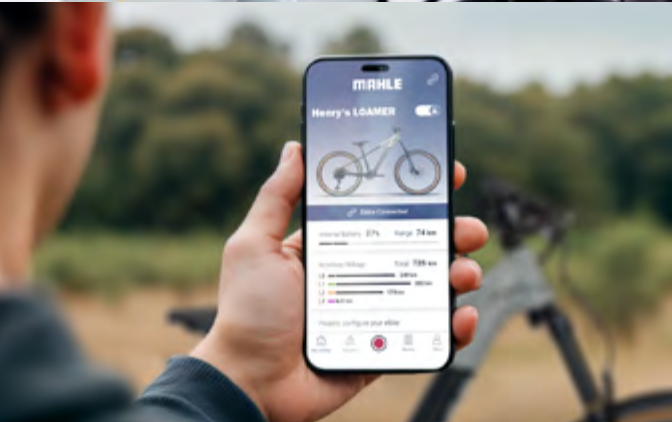

MAHLE X30

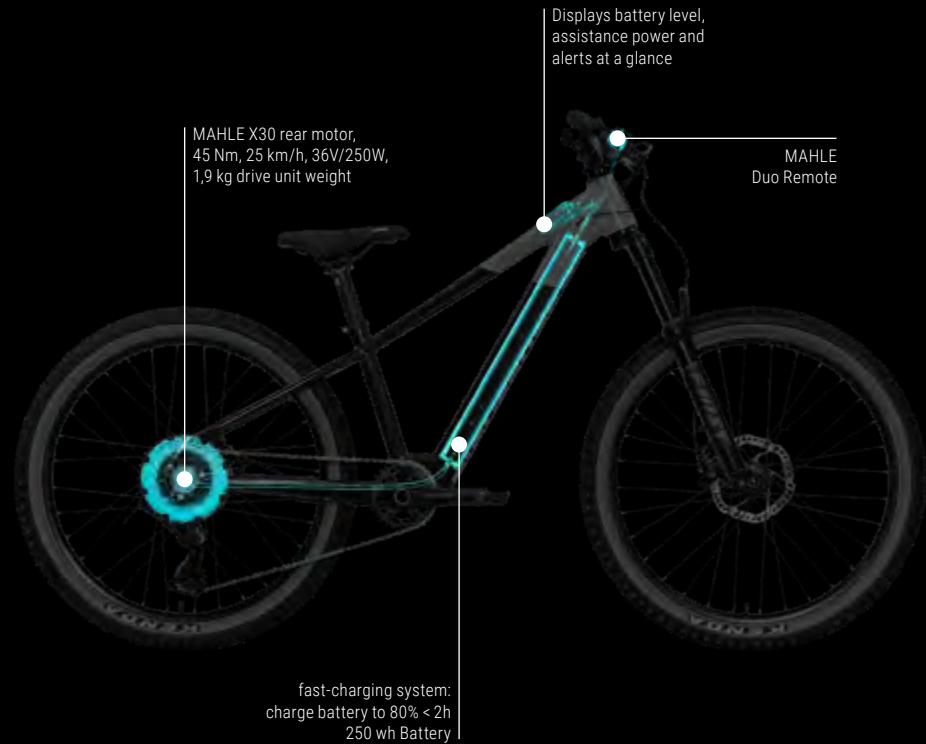

LOAMER 24




7 + Jahre/years

Höhe/height 128 cm -155 cm

Schritthöhe/step height 61 - 72 cm

- ✓ Hydroformed-Tubing AL 6061-T6, BSA 73, internal cable routing, Dropper Seatpost ready
- 🔋 MAHLE X30 rear motor, 45 Nm, 25 km/h, 36V/250W
- 🔋 250 wh Battery
- 📱 MAHLE Duo Remote
- ⚙️ Microshift Advent X 10 Speed gear, trigger shifter
- 🔊 30T Narrow Wide 11-42t
- 🏠 RST First 26 120 mm air suspension fork, 15 x 100 thru axle 140 mm
- 🪑 EIGHTSHOT SEAT 231 mm x 140 mm
- 🛞 Hydraulic Disc Brake, 160 mm
- 🚴 EIGHTSHOT 24" 32h / KENDA Booster 24 x 2, Skin Wall
- 📊 14,8 kg (ohne Pedale/without pedals)



E-HARDTAIL



7067




7069

JAMBAM 20

5 + Jahre/years
 Höhe/height 115 - 140 cm
 Schritthöhe/step height 53 - 69 cm

- Hydroformed-Tubing AL 6061-T6
- Single Speed, auf Schaltung umrüstbar
- Single Speed, Rear Derailleur Compatible
- 30 T Narrow Wide Chainring, 14 T Sprocket
- RST Spex 20, 100 mm Travel, Alloy Steerer
- 127 mm
- EIGHTSHOT SEAT 216 mm x 140 mm
- Hydraulic Disc Brake, 160 mm
- EIGHTSHOT 20" 24 H/KENDA Small Block Eight Skin Wall 20 x 2,10
- 9,6 kg (ohne Pedale/without pedals)



7064



JAMBAM 24



9 + Jahre/years

Höhe/height 140 - 165 cm

Schritthöhe/step height 69 - 84 cm



Hydroformed-Tubing AL 6061-T6



Single Speed, auf Schaltung umrüstbar

Single Speed, Rear Derailleur Compatible



30 T Narrow Wide Chainring, 14 T Sprocket



RST Snyder 24, 100 mm Travel, Alloy Steerer

140 mm



EIGHTSHOT SEAT 231 mm x 140 mm




Hydraulic Disc Brake, 160 mm



EIGHTSHOT 24" 32 H/KENDA Small Block Eight Skin Wall 24 x 2,10




10,6 kg (ohne Pedale/without pedals)



7065



COADY
16



COADY 16 SL



3,5+ Jahre/years

Höhe/height 105 - 125 cm

Schritthöhe/step height 45 - 53 cm



SLT® Straight-Line-Tubing AL 6061-T6



7-Gang Schaltung Trigger Schalthebel

7 speed gear derailleur, trigger shifter



28 T / 14 - 28 T



EIGHTSHOT Rigid Fork Alloy



89 mm



EIGHTSHOT SEAT 216 mm x 140 mm



V-Brake (front & rear)



EIGHTSHOT 16" 24h / VEE TIRE Crown Gem 2,25 Skin Wall




7,3 kg (ohne Pedale/without pedals)



7047





7057



COADY
20



COADY 20 DISC



5+ Jahre/years

Höhe/height 117 - 133 cm

Schritthöhe/step height 53 - 59 cm



SLT® Straight-Line-Tubing AL 6061-T6



7-Gang Kettenschaltung, Trigger Schalthebel



7 gear derailleur, trigger shifter



32 T / 14 - 28 T



RST CAPA T20 50mm Travel



102 mm



EIGHTSHOT SEAT 216 mm x 140 mm




Hydraulic Disc Brake, 160 mm



EIGHTSHOT 20" 32h / KENDA Booster 20 x 2,2 Skin Wall



9,9 kg (ohne Pedale/without pedals)



7054

COADY 20 SL DISC



5 + Jahre/years

Höhe/height 117 - 133 cm

Schritthöhe/step height 53 - 59 cm



SLT® Straight-Line-Tubing AL 6061-T6



7-Gang Kettenschaltung, Trigger Schalthebel

7 gear derailleur, trigger shifter



32 T / 14 - 28 T



EIGHTSHOT Rigid Fork Alloy



102 mm



EIGHTSHOT SEAT 216 mm x 140 mm




Hydraulic Disc Brake, 160 mm



EIGHTSHOT 20" 32h / KENDA Booster 20 x 2,2



9,7 kg (ohne Pedale/without pedals)



7036



7049

COADY 20 FS




5+ Jahre/years

Höhe/height 117 - 133 cm

Schritthöhe/step height 53 - 59 cm

- SLT® Straight-Line-Tubing AL 6061-T6
- 7-Gang Kettenschaltung, Drehschaltgriff
- 7 gear derailleur, twist shifter
- 32 T / 14 - 28 T
- RST CAPA T20 50 mm Travel
- 102 mm
- EIGHTSHOT SEAT 216 mm x 140 mm
- V-Brake (front & rear)
- EIGHTSHOT 20" 32h / KENDA Booster 20 x 2,2
- 9,7 kg (o. Pedale/without pedals)




7037

COADY 20 SL



5 + Jahre/years
Höhe/height 117 - 133 cm
Schritthöhe/step height 53 - 59 cm

- ▼ SLT® Straight-Line-Tubing AL 6061-T6
- ⚙ 7-Gang Kettenschaltung, Drehschaltgriff
7 gear derailleur, twist shifter
- 🔊 32 T / 14 - 28 T
- 🏠 EIGHTSHOT Rigid Fork Alloy
102 mm
- 🪑 EIGHTSHOT SEAT 216 mm x 140 mm
V-Brake (front & rear)
- 🛞 EIGHTSHOT 20" 32h / KENDA Booster 20 x 2,2 Skin Wall
- 📊 8,7 kg (ohne Pedale/without pedals)



7058



7059



The background of the entire image is a dark olive green color with a pattern of thin, light-colored, wavy lines that resemble topographic map contour lines. These lines flow across the frame in various directions, creating a sense of depth and texture.

COADY
24



COADY 24 DISC



7+ Jahre/years

Höhe/height 128 - 155 cm

Schritthöhe/step height 61 - 72 cm



SLT® Straight-Line-Tubing AL 6061-T6



8-Gang Kettenschaltung, Trigger Schalthebel

8 gear derailleur, trigger shifter



28 T / 11 - 34 T



RST CAPA T24 50 mm Travel, Soft Spring



140 mm



EIGHTSHOT SEAT 231 mm x 140 mm




Hydraulic Disc Brake 160 mm



EIGHTSHOT 24" 32h / KENDA Booster 24 x 2, Skin Wall

11,5 kg (ohne Pedale/without pedals)





7055

COADY 24 SL DISC



7+ Jahre/years


Höhe/height 128 - 155 cm

Schritthöhe/step height 61 - 72 cm

- SLT® Straight-Line-Tubing AL 6061-T6
- 8-Gang Kettenschaltung, Trigger Schalthebel
8 gear derailleur, trigger shifter
- 28 T / 11 - 34 T
- EIGHTSHOT Rigid Fork Alloy
140 mm
- EIGHTSHOT SEAT 231 mm x 140 mm
- Hydraulic Disc Brake 160 mm
- EIGHTSHOT 24" 32h / KENDA Booster 24 x 2,2
10,6 kg (o. Pedale/without pedals)



7040





COADY 24 FS




7 + Jahre/years

Höhe/height 128- 155 cm

Schritthöhe/step height 61 - 72 cm

- SLT® Straight-Line-Tubing AL 6061-T6
- 8-Gang Kettenschaltung, Drehschaltgriff
- 8 gear derailleur, twist shifter
- 28 T / 11 - 34 T
- RST CAPA T24 50 mm Travel, Soft Spring
- 140 mm
- EIGHTSHOT SEAT 231 mm x 140 mm
- V-Brake (front & rear)
- EIGHTSHOT 24" 32h / KENDA Booster 24 x 2,2
- 11 kg (o. Pedale/without pedals)



7041



COADY 24 SL



7+ Jahre/years


Höhe/height 128- 155 cm

Schritthöhe/step height 61 - 72 cm


- SLT® Straight-Line-Tubing AL 6061-T6
- 8-Gang Kettenschaltung, Trigger Schalthebel
- 8 gear derailleur, trigger shifter
- 28 T / 11 - 34 T
- EIGHTSHOT Rigid Fork Alloy
- 140 mm
- EIGHTSHOT SEAT 231 mm x 140 mm
- V-Brake (front & rear)
- EIGHTSHOT 24" 32h / KENDA Booster 24 x 2,2 Skin Wall
- 10,2 kg (ohne Pedale/without pedals)



7060



7061

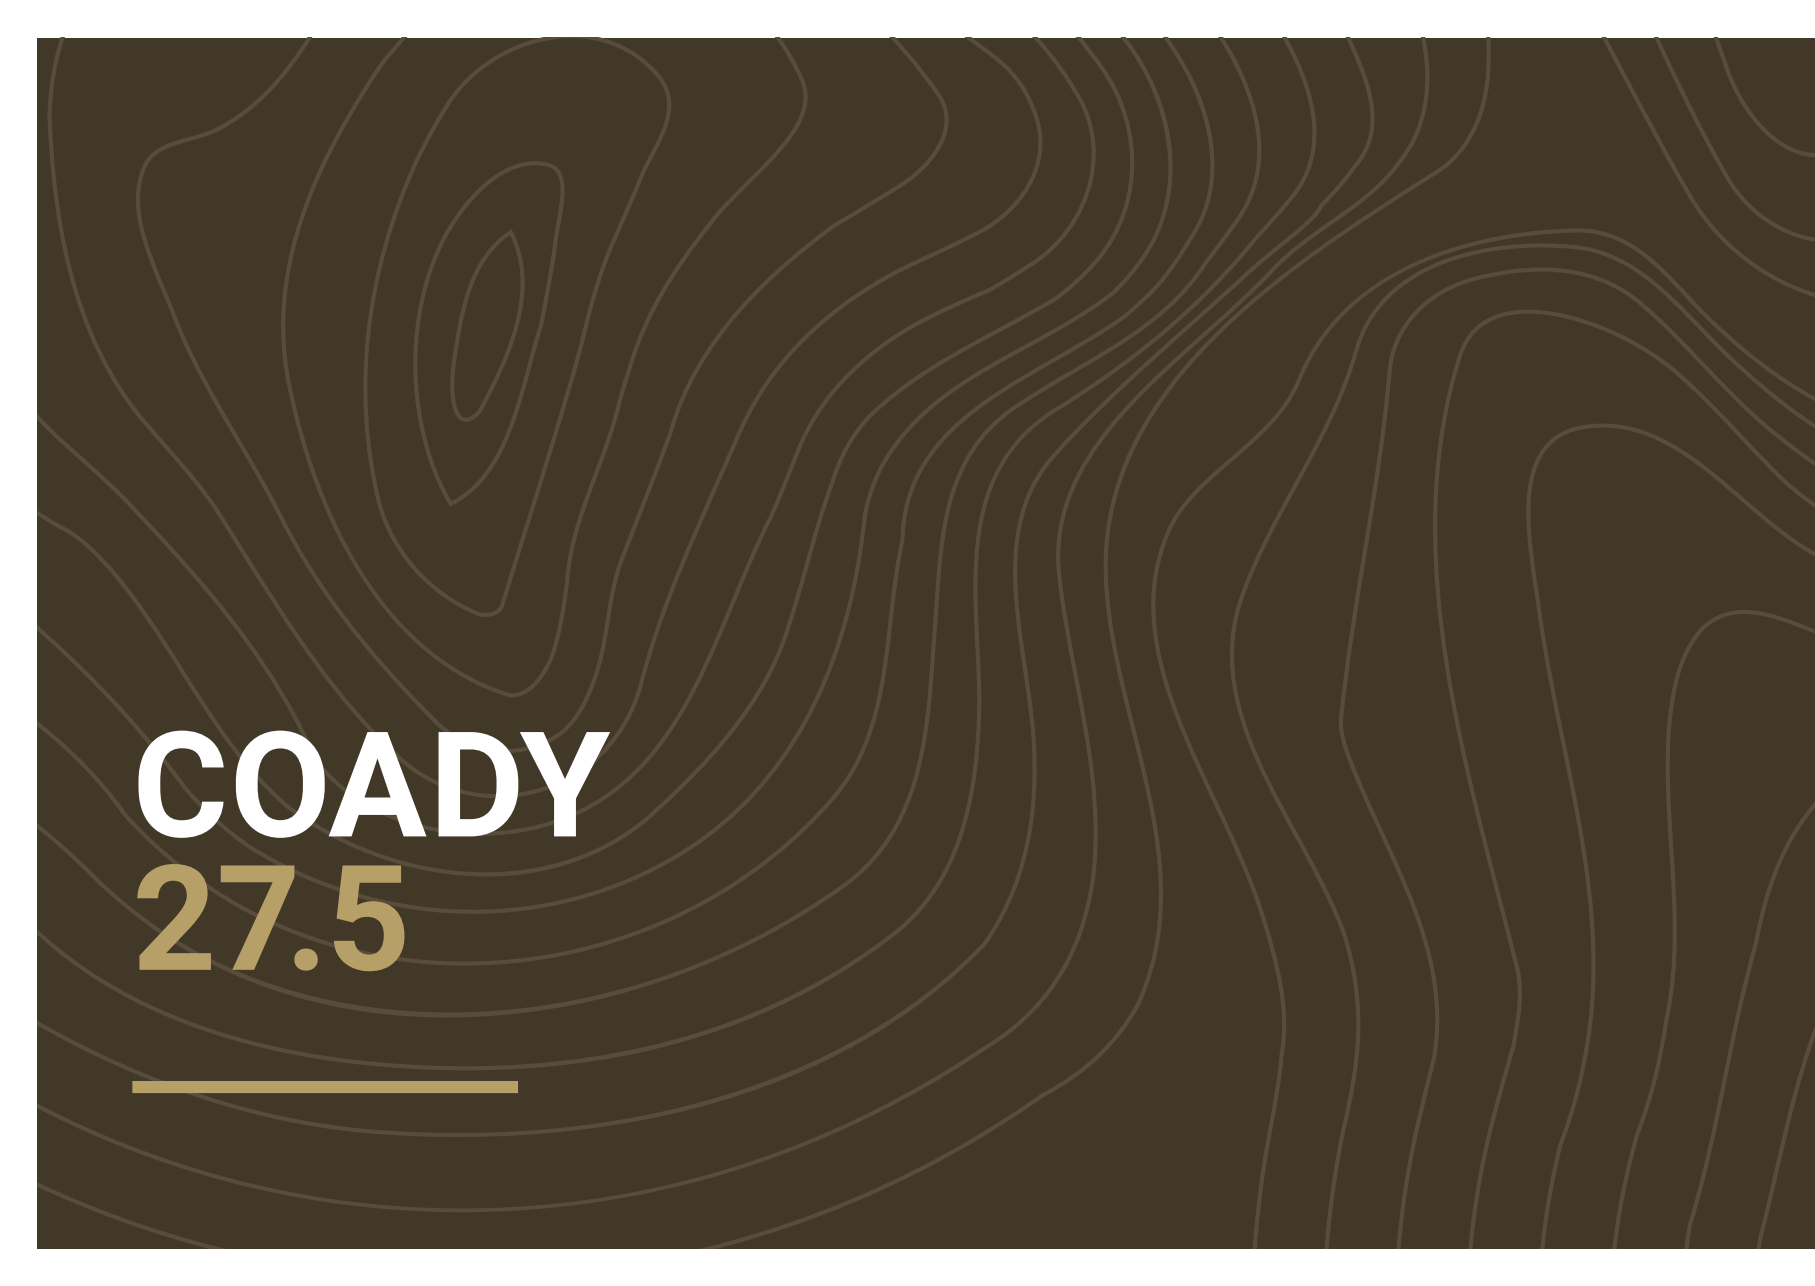The background of the image is a dark brown color with a pattern of light brown, wavy, concentric lines that resemble topographic map contour lines. These lines flow from the top left towards the bottom right, creating a sense of depth and movement.

COADY
27.5



COADY 275 DISC




10+ Jahre/years

Höhe/height 143 - 165 cm

Schritthöhe/step height 69 - 84 cm

- SLT® Straight-Line-Tubing AL 6061-T6
- Microshift Advent X 10 Speed gear, trigger shifter
- 30 T Narrow Wide Chainingring 11 - 42 T
- RST AERIAL MLC, 80 mm Travel, Alloy Steerer, mech. Lockout
- 152 mm
- EIGHTSHOT SEAT 231 mm x 140 mm
- Hydraulic Disc Brake, 160 mm
- EIGHTSHOT 27,5" 32h /
- KENDA Booster Pro 27.5 x 2,2 Skin Wall
- 12,2 kg (ohne Pedale/without pedals)



7056





7051

COADY 275 SL DISC



10 + Jahre/years

Höhe/height 143 - 165 cm

Schritthöhe/step height 69 - 84 cm



SLT® Straight-Line-Tubing AL 6061-T6



8-Gang Kettenschaltung, Trigger Schalthebel

8 gear derailleur, trigger shifter



28 T / 11 - 34 T



EIGHTSHOT Rigid Fork Alloy

152 mm



EIGHTSHOT SEAT 231 mm x 140 mm




Hydraulic Disc Brake, 160 mm



EIGHTSHOT 27,5" 32h / KENDA Booster 27.5 x 2,2



11,3 kg (o. Pedale/without pedals)



7046

COADY 275 FS




10 + Jahre/years

Höhe/height 143 - 165 cm

Schritthöhe/step height 69 - 84 cm

- SLT® Straight-Line-Tubing AL 6061-T6
- 8-Gang Kettenschaltung, Drehschaltgriff
8 gear derailleur, twist shifter
- 28 T / 11 - 34 T
- RST GILA T24, 80 mm Travel, Alloy Steerer, mech. Lockout
152 mm
- EIGHTSHOT SEAT 231 mm x 140 mm
- V-Brake (front & rear)
- EIGHTSHOT 27,5" 32h / KENDA Booster 27.5 x 2,2
- 12,2 kg (o. Pedale/without pedals)



7045





7063



COADY 275 SL



10 + Jahre/years

Höhe/height 143 - 165 cm

Schritthöhe/step height 69 - 84 cm



SLT® Straight-Line-Tubing AL 6061-T6



8-Gang Kettenschaltung, Trigger Schalthebel



8 gear derailleur, trigger shifter



28 T / 11 - 34 T



EIGHTSHOT Rigid Fork Alloy



152 mm



EIGHTSHOT SEAT 231 mm x 140 mm




V-Brake (front & rear)



EIGHTSHOT 27.5" 32h / KENDA Booster 27.5 x 2,2 Skin Wall



10,9 kg (ohne Pedale/without pedals)



7062

TEAM RIDER



HENRY WILDFÖRSTER

YoB: 2015 • **Location:** Bochum/Germany

Riding Style: Freeride/Pumptrack

RESULTS:

- 1. Place: WILD CHILD U10-Rennen (ENDURO ONE)
- 1. Place: ENDURO ONE, Schulenberg 2024
- 1. Place: ENDURO ONE, Trieb 2024
- 1. Place: ENDURO ONE, Bad Wildbad 2024
- 1. Place: German Pumptrack Cup. Essen 2023
- 1. Place: NRW Cup overall ranking 2022/2023
- 1. Place: Kidsworx Downhill, Innsbruck 2023
- 1. Place: Dirt Masters Kids Cup Winterberg 2021

@henry.wildfoerster



PIET GROSSE

YoB: 2015 • **Location:** Itzehoe/Germany

Riding Style: Dirt

RESULTS:

- 1. Place: Funduro. Rabensberg 2021
- 2. Place: Kidscup, Winterberg 2022
- 1. Place: Kings & Queen, München 2022/2023

@piets_playground



MIKA

KNAPP

YoB: 2011 · **Location:** Bochum/Germany

Riding Style: Dirt/ Freeride

RESULTS:

- 1. Place: Dirt Masters PUKOFFs, Winterberg 2024
- 1. Place: Dirt Masters Rookie Jam, Winterberg 2023
- 1. Place: MSV Steele DIRT Contest U15, Essen 2023
- 1. Place: NRW Cup overall ranking 2022


@mika.knapp

WE ARE ALWAYS LOOKING FOR NEW RIDERS!



Your trail starts here. Apply now: www.eightshot.com/pages/sponsoring

YOUTH SPECIFIC GEOMETRY

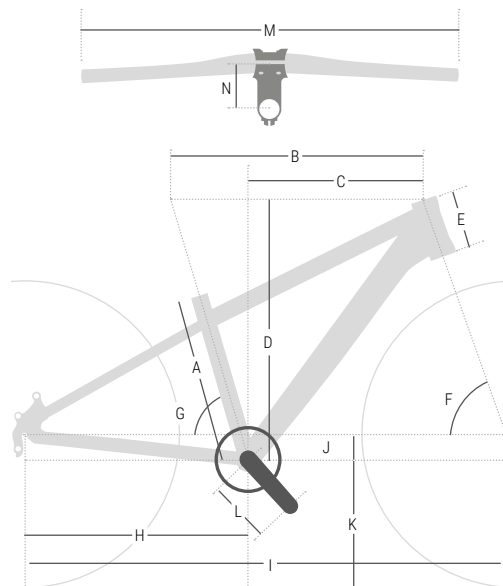

		16"		20"		24"		27.5"				
		SL	FS	SL	JAMBAM	FS	SL	JAMBAM	LOAMER	GROOT	FS	SL
A	SITZROHR Seat tube	205	265	265	255	320	320	280	320	320	360	360
B	OBERROHR Top tube	391	430	430	461	488	479	530	516	525	546	527
C	REICHWEITE Reach	265	300	300	320	330	330	370	355	375	363	358
D	BAUHÖHE Stack	348	426	426	460	517	485	527	561	555	598	553
E	STEUERROHR Head tube	125	105	105	100	115	115	100	100	90	105	125
F	LENKWINKEL Head angle	70	71°	71°	68,5°	70,5°	70,5°	68,5°	65.8	65.8	69,5°	69,5°
G	SITZWINKEL Seat angle	70	73°	73°	73°	73°	73°	73°	73	73	73°	73°
H	KETTENSTREBE Chain stay	290	375	375	325	425	425	375	395	395	435	435
I	RADSTAND Wheelbase	710	865	846	863	960	949	985	1030	1047	1033	1011
J	TRETLAGERABSENKUNG BB drop	0	38	38	11,5	45	45	18	30	30	65	65
K	TRETLAGERHÖHE BB height	210	230	214	242	266	266	292	310	310	284	284
L	KURBELLÄNGE Crank length	89	102	102	127	140	140	140	140	127	152	152
M	LENKERBREITE Handlebar	520	560	540	580	580	580	640	640	680	640	640
N	VORBAULÄNGE Stem length	35	45	60	35	60	60	35	35	35	60	60

Angaben in Millimeter – Ausstattungsänderungen und technische Änderungen vorbehalten
Dimensions in millimeters (mm) – Technical data and equipment specifications subject to change

LEGENDE INDEX

	Rahmen Frame		Übersetzung Transmission		V-Brake		Kurbel Crank		LaufRADSATZ Wheelset		Motor Motor		Bedieneinheit Control unit
	Gabel Fork		Gangschaltung Gear Shift		Disc brake		Sattel Seat		Gewicht Weight		Akku Battery		



Die Abbildungen der EIGHTSHOT-Modelle sind teilweise Vorschau Renderings und das Original kann abweichen. Alle Angaben über Lieferumfang, technische Daten und Leistungen sowie Spezifikationen der Räder entsprechend den zum Zeitpunkt der Drucklegung 05/2025 vorhandenen Kenntnissen. Alle Gewichtsangaben sind unverbindliche Richtwerte, diese wurden ohne Pedale und Seitenständer ermittelt. Alle Preise sind unverbindliche Preisempfehlungen. PUKY GmbH & Co KG behält sich das Recht vor, den Inhalt dieses Katalogs (Farben, Materialien und Spezifikationen) jederzeit und ohne Vorankündigung zu ändern. Haftung ist ausgeschlossen.

Für unsere Verträge und Lieferungen gelten ausschließlich unsere allgemeinen Geschäftsbedingungen, diese finden Sie unter:

www.eightshot.com/eightshot_de/allgemeine-geschaeftsbedingungen

The illustrations of the EIGHTSHOT models are sometimes thumbnail renderings and the original may differ. All specifications regarding the scope of delivery, technical data and services as well as bike specifications are in line with knowledge as of the time of going to print on 05/2025. All weight specifications are non-binding guidelines, these are without pedals and side stands. All prices are recommended retail prices. PUKY GmbH & Co KG reserves the right to change the contents of this catalogue (colours, materials, and specifications) at any time and without prior notice. No liability is accepted.

Only our general terms and conditions apply for our contracts and deliveries; these can be found under:

www.eightshot.com/eightshot_de/allgemeine-geschaeftsbedingungen



EIGHTSHOT

A brand by
PUKY GmbH & Co. KG

Fortunastrasse 11
42489 Wulfraath
Germany

info@eightshot.com

FIND US!

[@eightshot_bicycles](https://www.instagram.com/eightshot_bicycles)
www.eightshot.com